


■ PH2818B Series

Features 特点

- Susing flat wire, and SMD type. 采用扁平线，贴片类型
- Low radiation noise by magnetically shielded construction  
闭合磁路封装，低辐射
- High current, Low resistance. 大电流，低电阻
- Operating temperature : -40°C--+125°C. 工作温度：-40°C--+125°C
- Tray packaging: -40°C to +80°C 托盘包装：-40°C 至 +80°C
- Resistance to soldering heat Max three 40 second reflows at +260°C,  
parts cooled to room temperature between cycles  
耐焊接热 最多三个 40 秒回流 +260°C，部件在循环之间冷却至室温
- Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C /  
85% relative humidity)  
湿气敏感度等级 (MSL) 1 (在 <30°C 时的无限车间寿命/ 85% 相对湿度)

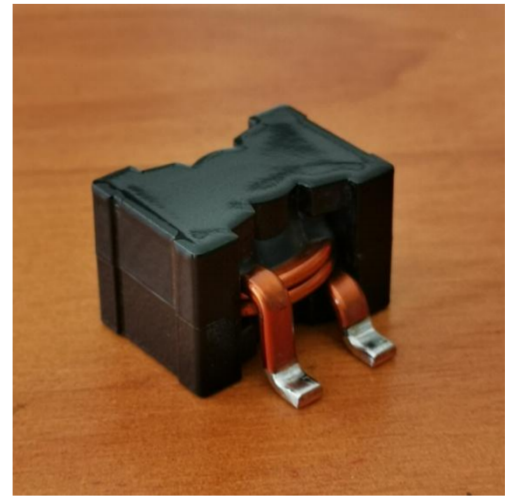

Applications 应用

- high efficiency DC/DC converters. 高效 DC/DC 转换器
- Single and polyphase buck converters. 单相、多相降压转换器
- Filter for audio applications. 音频滤波应用
- Optimized for high current boost applications. 大电流升压应用优化

Electrical characteristics 电气特性

Part number	①Inductance μH ±10%	②DCR 直流电阻 mΩ		③SRF 自谐频率 MHz	④Isat 饱和电流 A typical			⑤Irms 温升电流 A typical	
		typ	max.		10% drop	20% drop	30% drop	20°Crise	40°Crise
PH2818B-102KL	1.0	0.44	0.48	53	122	124	125	56	86
PH2818B-152KL	1.5	0.44	0.48	37	85	89	91.8	56	86
PH2818B-332KL	3.3	0.88	0.97	28	61	68	70	47	58
PH2818B-472KL	4.7	0.88	0.97	22	43.6	48.2	49.4	47	58
PH2818B-682KL	6.8	0.88	0.97	18	31.8	37.8	39.2	47	58
PH2818B-103KL	10	0.88	0.97	15	22.8	24	25	47	58

Remark

- ①Inductance is measured with a LCR meter Agilent 4284A or equivalent.  
Test frequency at 500kHz
- ②DC resistance is measured with Keithley 580 Milliohm Meter, or equivalent.  
Reference ambient temperature 25°C
- ③ SRF measured using an Agilent 4395A network analyzer and an Agilent 16193A test fixture.
- ④ DC current at 25°C that causes the specified Inductance drop from its value without current.
- ⑤ Current that causes the specified temperature rise from 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.
- ⑥ Electrical specifications at 25°C

备注


- ①电感量测试采用 Agilent 4284A 数字电桥或同等仪器；  
测试频率 500KHz
- ②直流电阻测试采用 Keithley 580 毫欧表或同等仪器；  
环境温度 25°C
- ③SRF 使用 Agilent 4395A 网络分析仪和 Agilent 16193A 测试夹具测量。
- ④直流电流在 25°C，加载导致指定电感从没有电流的值下降。
- ⑤导致指定温度从 25°C 环境温度上升的电流。此信息仅供参考，不代表绝对最大额定值。
- ⑥25°C 时的电气规格

ShenZhen Powerhen Electronic Co.,Ltd


Addr: Floor 3, Building 2, Shenliang Automotive Electronic Industrial Park, Guanlan Town, Shenzhen

Tel: 0755-23570708 E-Mail: sales@powerhen.com

Dimensions 结构尺寸

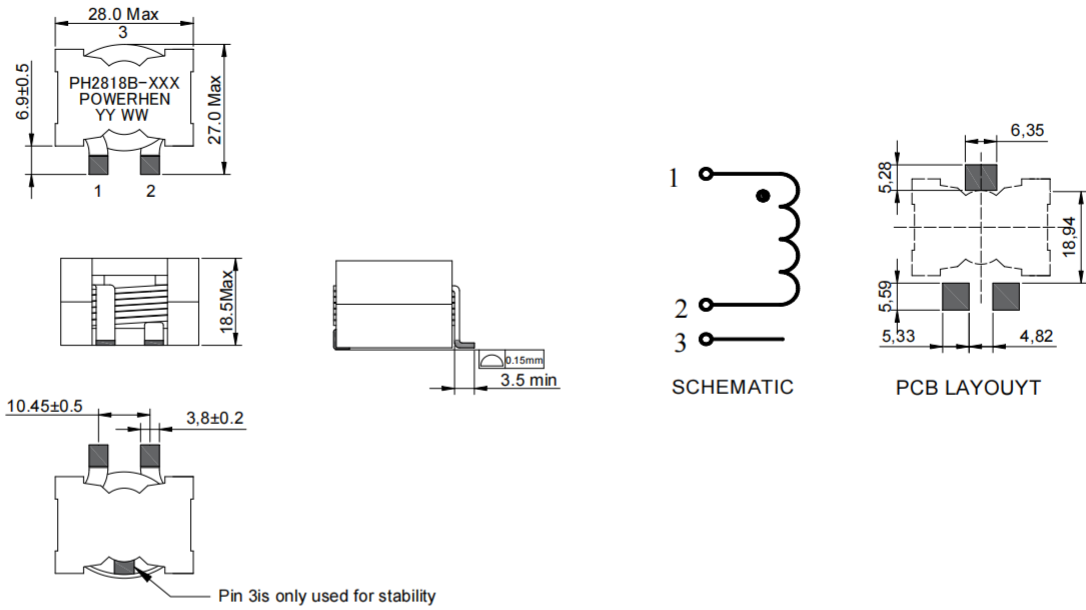


Electrical Characteristic Curve 电气性能曲线

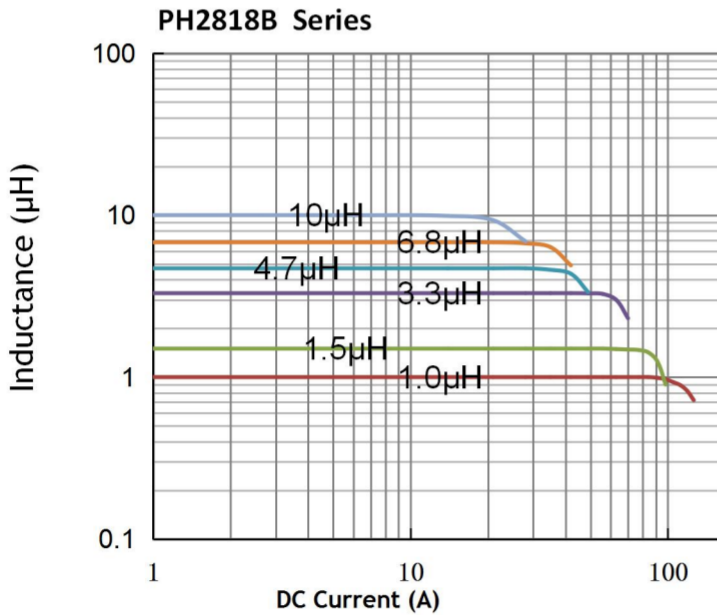

■ Packaging Specification - tray: [mm]

包装规格 - 托盘包装: [mm]

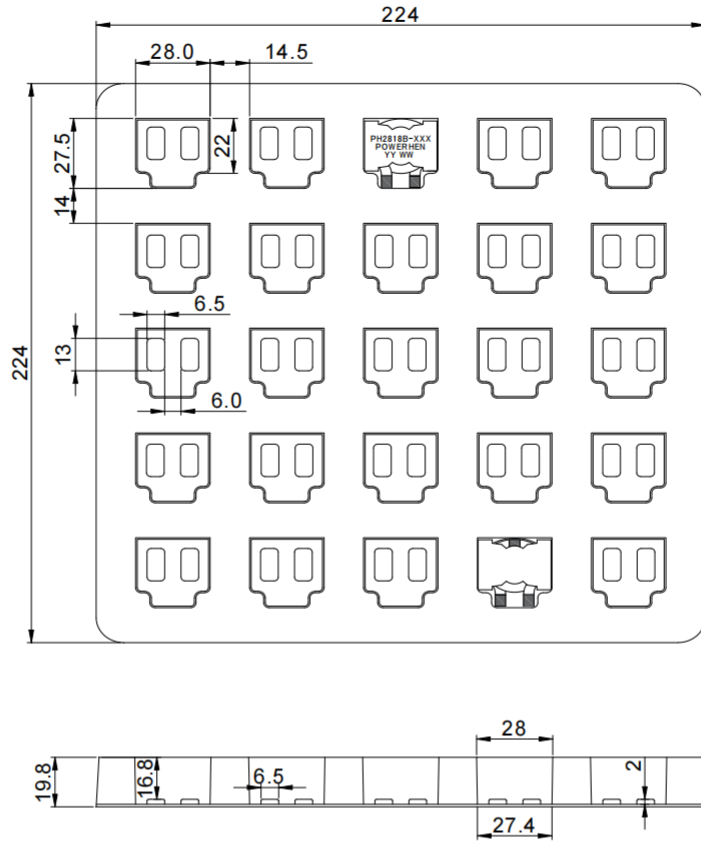

Weight 重量: 38.1g/PCS  
 Packaging 包装数量: 25 PCS/盘